


# 28 KZM



Item ( 項目 )	Specifications ( 規格 )
Step Angle Accuracy (步進角精度)	±5%(full step,no load)
Resistance Accuracy (電阻精度)	±10%
Inductance Accuracy (電感精度)	±20%
Temperature Rise (溫升)	80°C Max,(rated current,2phase on)
Ambient Temperature (環境溫度)	-10°C ~+50°C
Insulation Resistance (絕緣等級)	100MΩ Min,500VDC
Dielectric Strength(介電強度)	500VAC for one minute
Shaft Radial Play (轉軸徑向跳動)	0.06Max,(450g-load)
Shaft Axial Play (轉軸軸向跳動)	0.08 Max,(450g-load)

## 尺寸圖

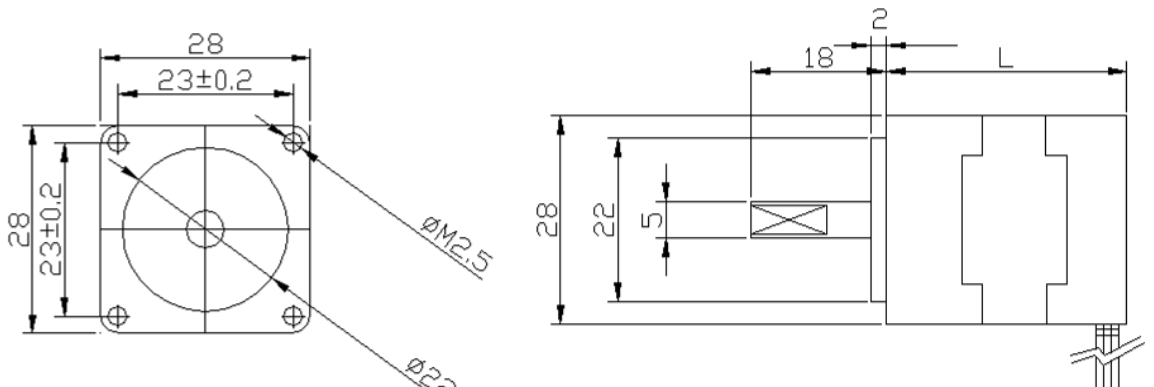

(Model No.) 型號		Rated Voltage 電壓	Current/p hase 電流	Resistance/ phase 電阻	Holding Torque 靜力矩	# of leads 引線	Weight 重量	Length 機身長	Rotor Inertia 轉子慣量	AWG 線規
Single Shaft (單出軸)	Double Shaft (雙出軸)	V	A	Ω	Kg-cm		kg	mm	g-cm <sup>2</sup>	
28KZM2203A	28KZM2203B	2.66	0.95	2.8	0.43	6	0.11	32	9	28
28KZM2204A	28KZM2204B	0.67	0.67	5.6	0.6	4	0.11	32	9	28
28KZM2301A	28KZM2301B	3.2	0.95	3.4	0.75	6	0.14	44	12	28
28KZM2302A	28KZM2302B	4.6	0.67	6.4	0.95	4	0.14	44	12	28
28KZM3602A	28KZM3602B	2.6	1.2	2.6	0.62	6	0.2	50	18	28
28KZM3601A	28KZM3601B	2.88	1.2	2.4	1.3	4	0.2	50	18	28