

型號 / type

孔徑 / inside dia 鍵槽 / key-seating



撓性聯軸器 鋼片加長型


CM-HWL 尺寸表 / Dimension

單位 / Unit : mm

規格 NO	D1×D2/公差 Tolerance(H8)		H	K	B	E	F	L	G	M
	min	max								
HWL-35C	6	12	24	35	13	3	8	40	9	M3
HWL-40C	8	14	28	40	17	3.95	10	51.9	10.5	M4
HWL-45C	10	19	32	45	18	3.95	10	53.9	13	M4
HWL-56C	12	24	42	56	21.4	5.2	12	65.2	16.5	M5
HWL-68C	14	25	46	68	24	5.5	15.5	74.5	17.5	M6
HWL-82C	19	35	62	82	30	8.8	21.5	99.1	24	M8

CM-HWL 特性表 / Specifications

規格 NO	常用 扭力 (N.m)	最大 扭力 (N.m)	容許角度偏差 Allowable Angular Error			最高 轉速 (rpm)	慣性距 (kg.m ²)	重量 (g)
			偏心 (mm)	偏角 (°)	軸向 位移 (mm)			
HWL-35C	4	8	0.2	2	±0.40	10000	3.8×10^{-6}	53
HWL-40C	6	12	0.24	2	±0.50	10000	12.5×10^{-6}	93
HWL-45C	10	20	0.24	2	±0.60	10000	16.42×10^{-6}	122
HWL-56C	25	50	0.28	2	±0.80	10000	48×10^{-6}	275
HWL-68C	45	90	0.34	2	±0.90	10000	126×10^{-6}	493
HWL-82C	95	190	0.52	2	±1.10	10000	565×10^{-6}	927

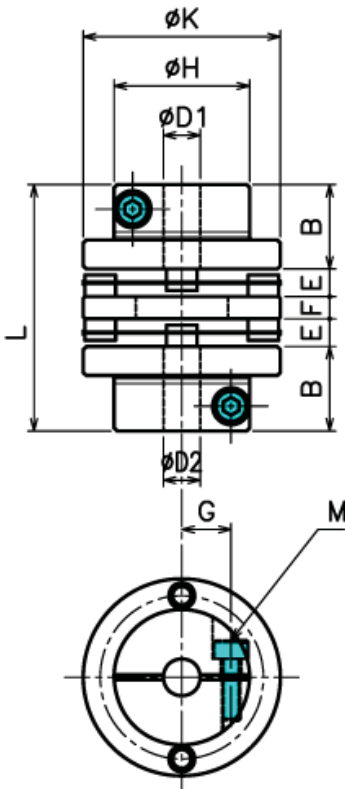

FEATURES :

- ✦ 高剛性 / High Rigid
- ✦ 高扭力 / High Torque
- ✦ 低慣性 / Low Inertia Moment of Inertia
- ✦ 零迴轉間隙 / Zero Backlash
- ✦ 適合用於工具機械，高精密傳動機組 /
The Features applicable For Working Machinery and it comes with the hi-precision transfer function
- ✦ 緩衝材：不銹鋼彈片 / Buffer Material : Stainless
- ✦ 固定方式：夾鉗式 / Fix Type : Clamping